

- **80 PLUS® Platinum certified efficiency**
- **Compliant with ATX 12V 3.1**
- **Supports PCIe GEN5**
- **Fully modular cable management**
- **Full Japanese capacitors**
- **Ultra-soft embossed cables**



The **CHIEFTEC Stealth Series** power supply is built to Intel's ATX 12V 3.1 standard and supports PCIe GEN5, offering 80PLUS Platinum certified efficiency. This delivers top-tier performance and stability demanded for your high-end systems. It prioritizes a competitive price-performance ratio up to 1200W while maintaining the trusted **CHIEFTEC** quality.

The **Stealth Series** features an LLC Half-Bridge converter with DC-to-DC technology to provide enhanced power efficiency and stability. It is equipped with full Japanese capacitors for higher durability and reliability.

The fully modular design with long ultra-soft embossed cables simplifies cable management, reduces clutter, and makes installation easier.

Additionally, its 135mm fluid dynamic bearing (FDB) silent fan optimizes the balance between cooling performance and noise levels. The **Stealth Series** is your reliable choice for all computing needs, incorporating all necessary modern protection and safety features.



## TECHNICAL DATA






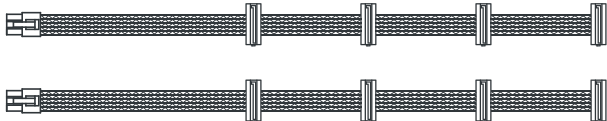

Model	Stealth 1200W
Article no.	SPX-1200-FC
EAN code	0753263079268
Specification	ATX 12V 3.1
Form factor	ATX
Efficiency	80Plus Platinum
PFC	Active PFC
Fan	135mm FDB fan
Dimension(DxWxH)	140mm x 150mm x 86mm
P.F.	≥0.95
Security	AFC (Automatic Fan speed Control) OPP (Overload protection) OTP (Over Temperature Protection) OVP (Overvoltage protection) SCP (Short-circuit protection) SIP (Surge & Inrush Protection) UVP (Under Voltage protection) OCP (Over-Current Protection)
Warranty	5 Years

## OUTPUT DATA

SPX-1200-FC	AC Input	100 - 240V~ / 15.0 - 7.5A / 50 - 60Hz				
	DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max. Current	20A	20A	100A	-	3.0A	
Max. Combined Power	100W		1200W	-	15W	
	1200W					

\*The listed specifications may be altered at any point in time without any pre-notice.

\*\*Chieftec® is a registered trademark. All other brands and/or logos are property of the respective owners.

	Cable	Connectors	Length (mm)
	24 PIN ATX	1	600
	8 PIN EPS	1	1 x 700
	8 PIN EPS (4+4)	1	1 x 700
	8 PIN PCIe (6+2)	3	3 x 650
	16 PIN 12V - 2 x 6	2	2 x 650
	SATA	8	2 x 500/150/150/150
	SATA/MOLEX	2/2	1 x 500/150/150/150

### Specifications



Version: 09/2025

\*The listed specifications may be altered at any point in time without any pre-notice.

\*\*Chieftec® is a registered trademark. All other brands and/or logos are property of the respective owners.